

# Fairfax® Kitchen Sink Faucet K-12176

#### **Features**

- Matching sidespray provides flexibility and convenience for cleaning and food prep.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Single lever handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).

#### Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

- For two-hole installation.
- Flexible supply lines simplify installation.

### **Recommended Products/Accessories**

K-23723 Faucet cleaner

### Optional Products/Accessories

1030920 Side Spray Deep Rough-In



ADA CSA B651

#### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 CSA B651

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	СВ	Polished Chrome with Vibrant® Polished Brass Accents





# Fairfax® Kitchen Sink Faucet K-12176

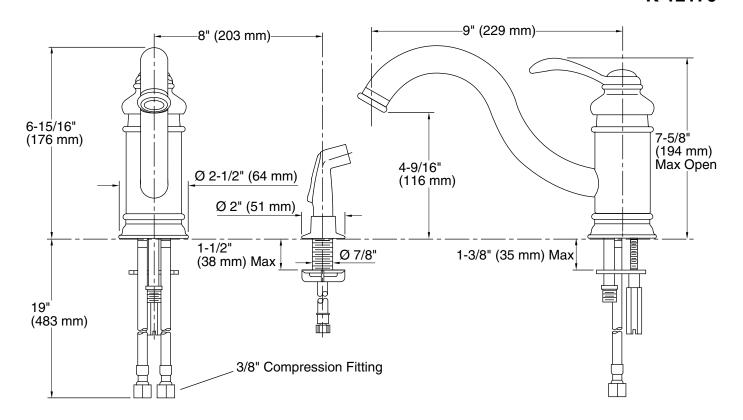

## **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Spout:

Spout reach: 9" (229 mm)

#### **Notes**

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

